




南京宇航橡胶有限公司
NANJING YUHANG RUBBER CO.LTD

橡胶 V 带

产品宣传画册

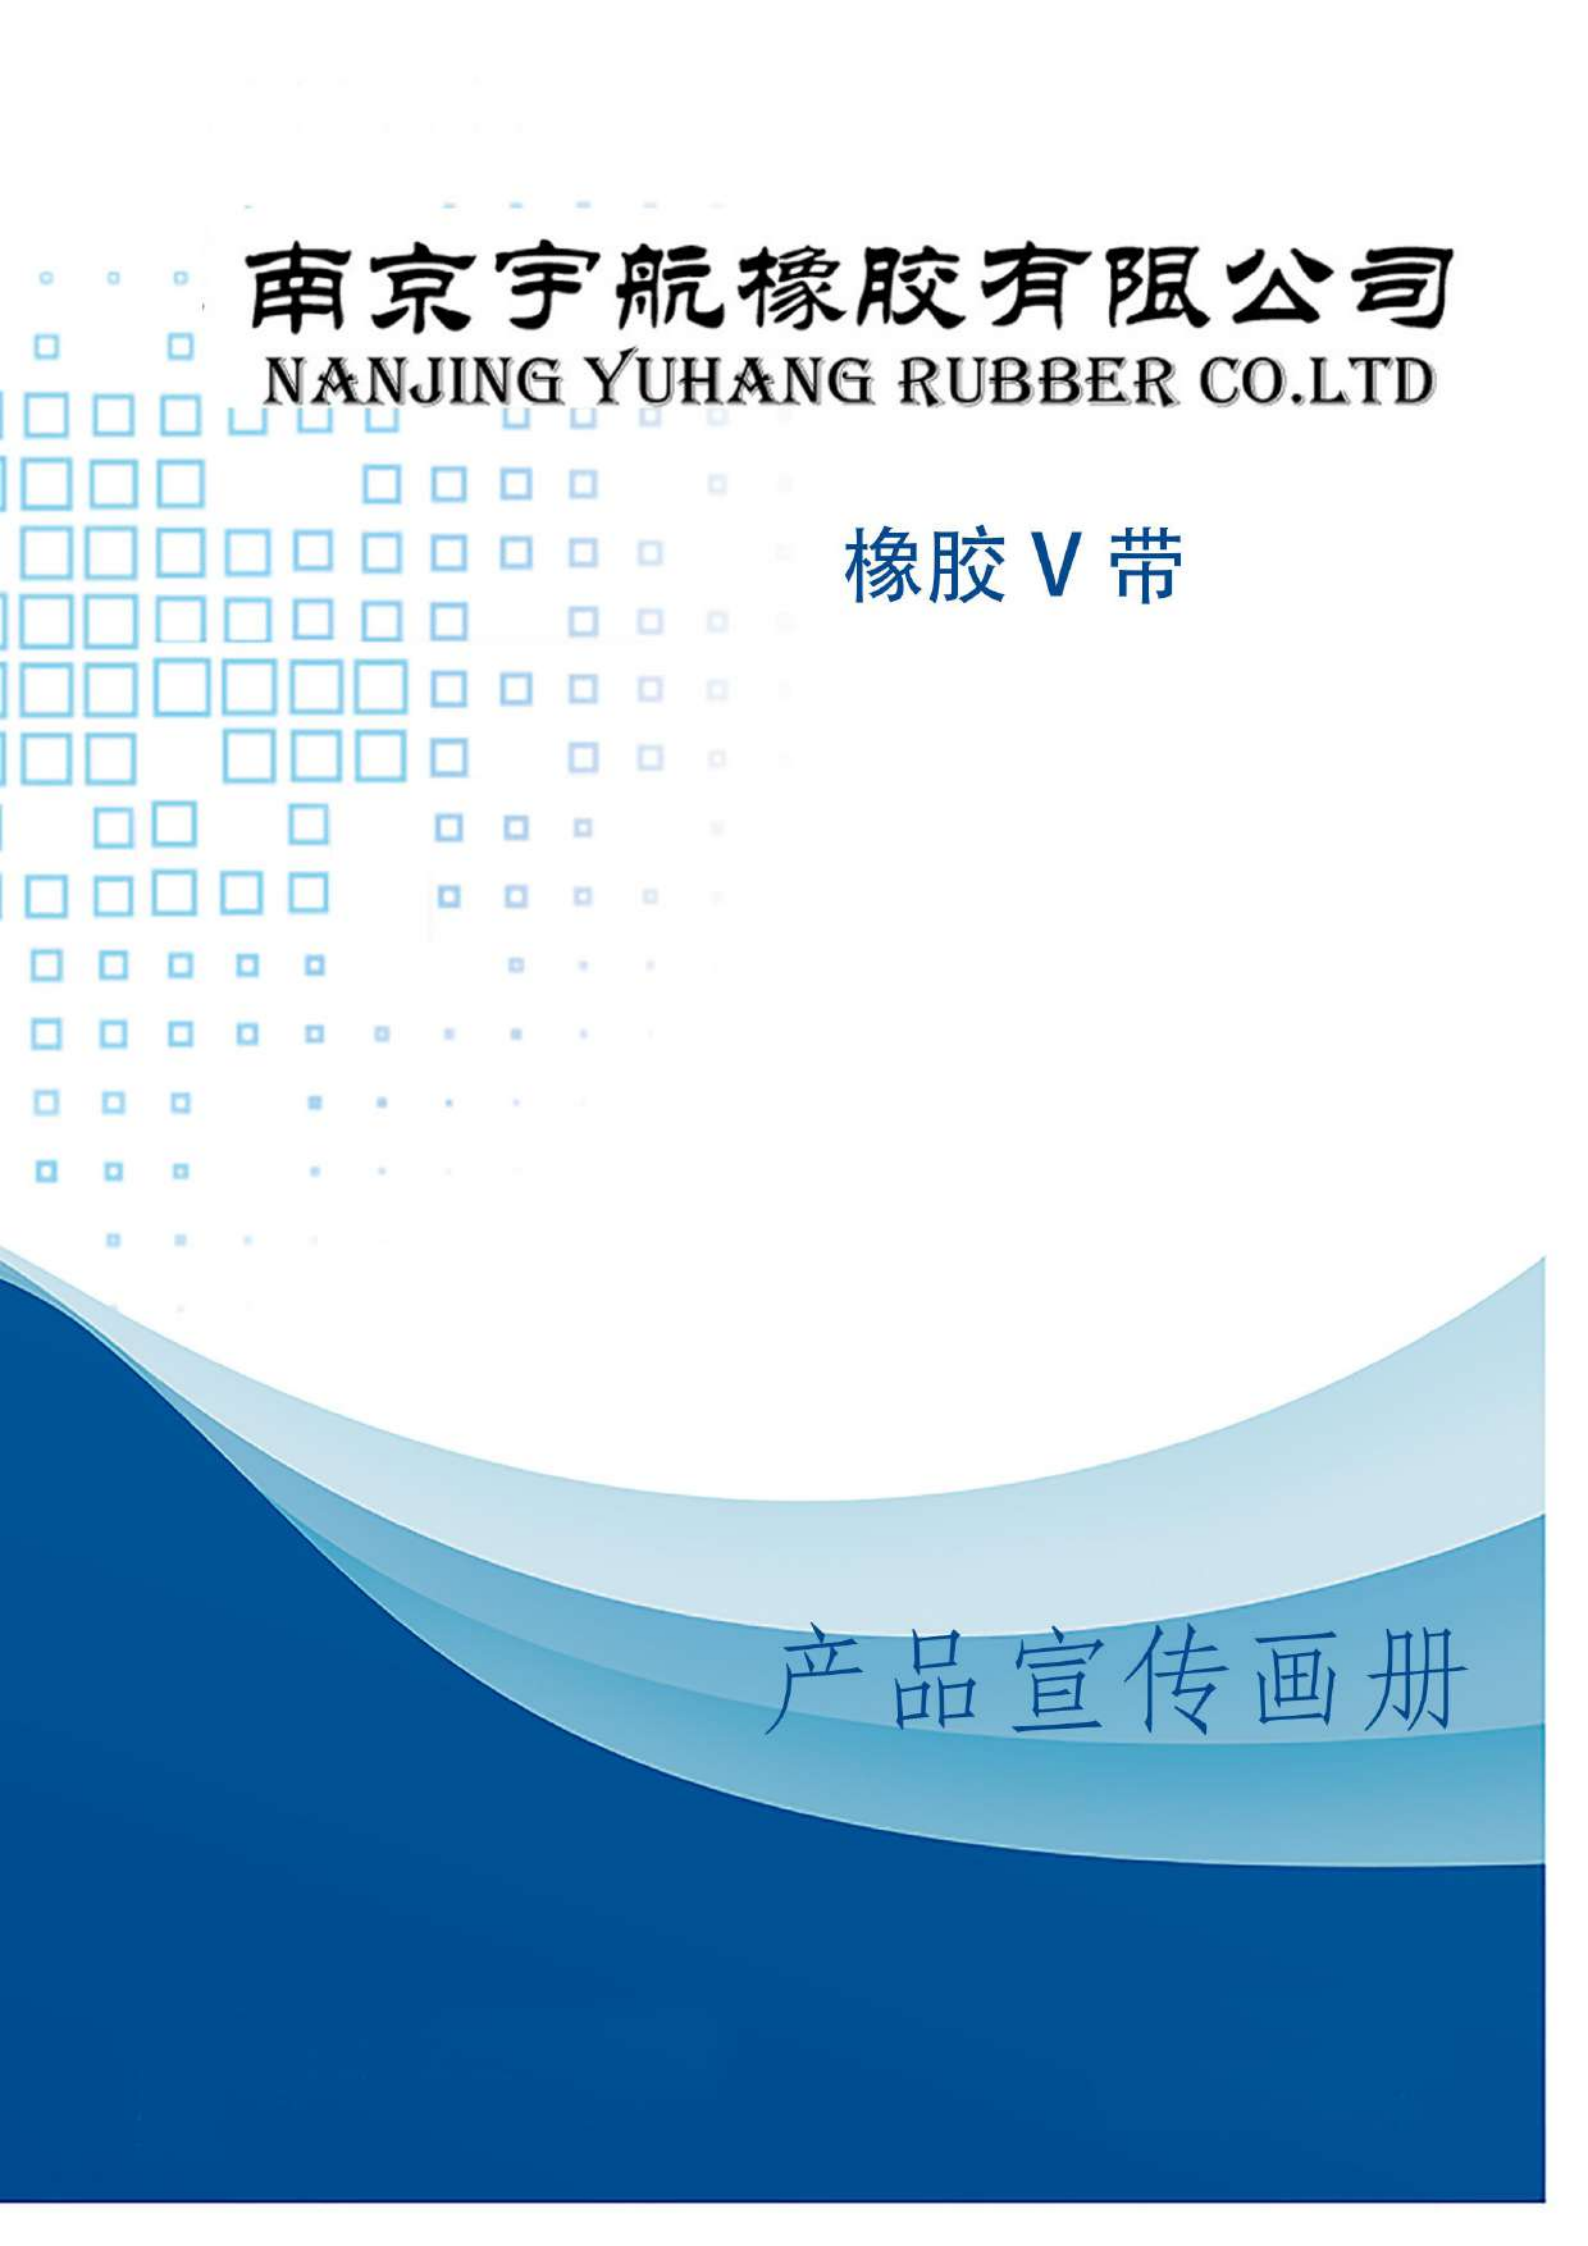

南京宇航橡胶有限公司

NANJING YUHANG RUBBER CO.LTD

南京宇航橡胶有限公司简介

南京宇航橡胶有限公司是橡胶领域的佼佼者，专注于橡胶传动带和橡胶 V 带的研发与生产。凭借多年积累的行业经验和先进的生产技术，公司已成为业内公认的品质标杆。我们生产的橡胶传动带和 V 带具有优异的耐磨性、抗疲劳性和高效的动力传输能力，广泛应用于机械、汽车、农业等多个行业。南京宇航橡胶始终秉持创新与质量并重的理念，持续引进先进的生产设备与检测技术，确保每一件产品都能达到严格的国际标准。我们致力于为客户提供定制化解决方案，帮助其提升生产效率，降低运营成本。南京宇航橡胶有限公司以卓越的产品质量和完善的售后服务，赢得了国内外客户的广泛信赖与好评。

Nanjing YUHANG Rubber Co., Ltd. is a leader in the rubber industry, specializing in the research and production of rubber transmission belts and rubber V-belts. With years of industry experience and advanced production technology, the company has become a recognized quality benchmark in the industry. Our rubber transmission belts and V-belts offer excellent wear resistance, fatigue resistance, and efficient power transmission, widely used in machinery, automotive, agriculture, and other industries. Nanjing Aerospace Rubber upholds the concept of balancing innovation and quality, continuously introducing advanced production equipment and testing technologies to ensure that every product meets strict international standards. We are committed to providing customized solutions for our clients, helping them improve production efficiency and reduce operational costs. Nanjing Aerospace Rubber Co., Ltd. has earned widespread trust and praise from customers both domestically and internationally with its excellent product quality and comprehensive after-sales service.



检测设备



目录 CONTENT

01 汽车V带 Automobiles V-Belt

02 多楔带 Poly-Rib Belt

03 联组V带 Banded V-Belt

04 变速V带 Variable Spe V-Belt

05 摩托车V带截面尺寸
V-belts for motorcycles section measure

06 同步带 Timing Belt

07-11 型号规格表

12-17 汽车V带英制和公制型号表示方法对应表

18 注意事项


汽车V带 Automobiles V-Belt

▶ 产品特点 CHARACTERISTICS OF THE PRODUCT

本公司能生产各种型号的切边式汽车V带，采用高强度、伸长率小、屈挠性能良好的骨架材料为抗拉体，胶料采用优质三元乙丙橡胶，产品各项性能指标均超过国际GB12732-1996一等品要求，产品质量达到国际先进水平。



Our company can produce various types of trimmed automotive V-belts, using high-strength, low elongation, and good flexibility framework materials as tensile bodies. The rubber material is high-quality neoprene rubber. All performance indicators of the product exceed the international GB12732-1996 first-class product requirements, and the product quality reaches the international advanced level.

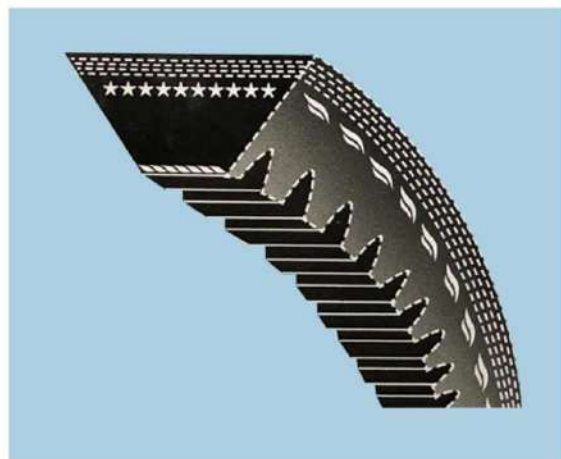

型号 Type	顶宽 Width	高度(Height)			角度 Angle
		普通切边式 Ordinary cutting- side type	底胶夹布切边式 Rubber lined with Toothed cutting- side type	有齿切边式 Toothed cutting- side type	
AV9.5	9.5	—	—	—	40
AV10	10	7.5	7.5	8.0	40
AV12.5	12.5	—	—	—	40
AV13	13.0	8.5	8.5	9.0	40
AV15	15.0	—	—	9.0	40
AV17	17.0	9.5	9.5	11.0	40
AV22	22.2	—	—	13.0	40


多楔带 Poly-Rib Belt



产品特点 CHARACTERISTICS OF THE PRODUCT

橡胶多楔带兼有V带和平带二者的优点，既有平带的柔软、强韧的特点，又有V带紧凑、高效等优点。本公司生产各种型号橡胶多楔带，具有耐磨、耐高低温、性能好、使用寿命长等优点。

It has advantages of both V-belt and flat-belt, soft and tough, taut and efficient. All kinds of ribbed rubber belts produced in our factory, it has the advantages of wear resistance, high and low temperature resistance, good performance, and long service life.

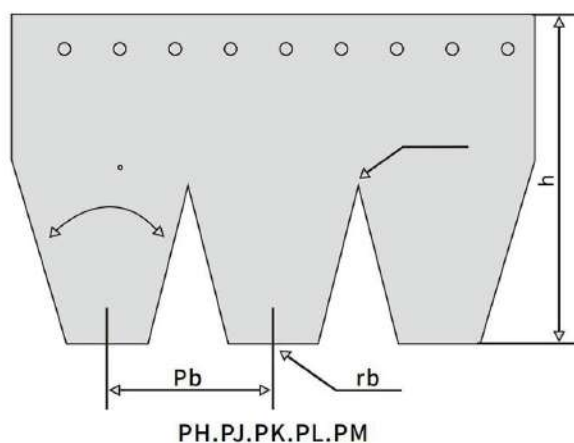

型号 Type	楔距 Rib section	楔角 Angle or Rib	带厚 Thickness	楔数 Rib Numbers	角度 Angle
PH	1.6	40	3	3-90	540-1270
PJ	2.34	40	3.5-4	3-210	600-3000
PK	3.56	40	4-5	3-140	600-3000
PL	4.7	40	6-8	3-104	900-3000
PM	9.4	40	17	3-16	1500-3000

联组V带 Banded V-Belt



产品特点 CHARACTERISTICS OF THE PRODUCT

联组V带是由具有高模量线绳和特殊配方的氯丁胶化合物组成，一次成型硫化具有良好的整体性。

各条带受力均匀、运行平稳、承载传力高、使用寿命长、不易抖动和翻带。适用于脉动符合和有冲击振动的场合。特别适合用于高值地面的平衡轴传动。

Banded V-belt is composed of a high modulus wire rope and a specially formulated chloroprene rubber compound, which has good integrity during one-time molding and vulcanization.

Each strip has uniform force, smooth operation, high load-bearing capacity, long service life, and is not easy to shake or flip. Suitable for occasions with pulsation and shock vibrations. Especially suitable for balanced shaft transmission on high-value ground.



型号Type	顶宽Top Width	节宽 Pitch	带高 Heigh	角度 ° Angle
AJ/HA	13	—	10	40
BJ/HB	17.0	—	13	40
CJ/HC	22	—	16	40
DJ/HD	32	—	21.5	40
SPZ/XPZ	10	8	8	40
SPA/XPA	13	11	10	40
SPB/XPB	17	14	14	40
SPC/XPC	22	19	18	40
3V/3V*(9N)	9.5	8.5	8	40
5V/5V*(15N)	16	14.3	13.5	40
8V/8V(25)	25.4	23.7	23	40

变速V带 Variable Spe V-Belt



Variable speed V-Belt uses high strength and heat sensitive tension members or aramid fibre,the belt runs efficiently along with the change of drive speed even under critical conditions like big shooks and high temperature, special suited for motocycles, industrial machine, agriculture machine.

产品特点 CHARACTERISTICS OF THE PRODUCT

变速V带采用高强度感应张力线和芳纶线绳, 保证皮带在大冲击力、高温等恶劣的变速转动情况下也能进行大功率传动, 特别适用于摩托车、工业机械、农业机械的传动。



型号Type	顶宽Top Width	节宽 Pitch	带高 Heigh	角度 ° Angle
W16	17	—	6	28
W20	21	—	7	28
W25	26	—	8	28
W31.5	33	—	10	28
W40	42	—	13	28
W50	52	—	16	28
W63	65	—	20	28
W80	83	—	26	28
W100	104	—	32	28
1022V	16	—	6	22
1422V	22	—	8	22
1922V	30	—	11	22
2322V	36,5	—	12	22
2926V	46	—	14	26
4430V	70	—	17	30
4836V	76	—	22	36
6236V	100	—	26	36

摩托车V带截面尺寸 V- belts for motorcycles section measure

▶ 产品特点 CHARACTERISTICS OF THE PRODUCT

本公司生产的50型、90型、150型等各种车型摩托车型V带及各种助动车V带，生产质量达到国内领先水平。

Our company can produce allkinds cutting-type v-belts for motorcycles. Such asmotocycles of model50, model90, model1 25, model 150 and V- belts for motorcars keeps leadlevel.


型号Type	单位Unit	Vs15	Vs15.5	Vs16.5	Vs17	Vs18	Vs19	Vs20	Vs22	极度偏差
顶宽Top Width	mm	15	15.5	16.5	17	18	19	20	22	± 0.6
带高Belt Heigh	mm	8	8.5	8.5	8.5	8.5	10	10	10	± 0.6
楔角 Rib angle				28°	30°	32°				± 1°

规格	外周长	内周长	有效长度	规格	外周长	内周长	有效长度
641x15.5	653	600	650	765x17.5	777.00	721.00	774.00
661x15	763	620	760	777x17.5	777.00	721.00	774.00
666x16.5	669	615	666	788x15.5	788.00	736.00	785.00
669x17.5	684	631	680	788x17	800.00	746.00	797.00
669x18	680	630	677	788x16.6	792.00	736.00	789.00
667x17.5	677	627	678	792x16.6	792.00	742.00	789.00
692x17.5	704	651	701	797x16.6	797.00	746.00	794.00
780x18	720	667	717	799x19	818.00	757.00	815.00
710x17	720	688	738	811x20	814.00	751.00	811.00
729x17.7	741	695	749	821x20	831.00	768.00	828.00
740x17	752	695	755	835x20	842.00	779.00	839.00
743x20	758	695	755	842x20	842.00	719.00	839.00
746x20	758	695	755	858x22	870.00	801.00	867.00
759x20.1	758	695	755	862x22	870.00	801.00	867.00
760x19.5	758	695	755	1016x15	1066.00	101.00	1063.00


同步带 Timing Belt

同步带型号及相关尺寸 Various Types and Sizes of Timing Belt


齿形型号 (Gear Code)	型号 (Type)	节距 (PB)	齿高 (ht)	带厚 (hs)	双面齿带 (hs)	齿形型号 (Gear Code)	型号 (Type)	节距 (PB)	齿高 (ht)	带厚 (hs)	双面齿带 (hs)
梯形齿 TTOOTH	MXL	2.032	0.51	1.14	/	圆弧齿 ARC TOOTH	3M	3	1.17	2.40	3.10
	XXL	3.175	0.76	1.52	/		5M	5	2.06	3.80	5.28
	XL	5.080	1.27	2.30	3.05		8M	8	3.36	6.00	8.18
	L	9.525	1.91	3.60	4.58		14M	14	6.02	10.0	14.80
	H	12.70	2.29	4.30	5.95		20M	20	8.40	13.20	21.12
	XH	22.225	6.35	11.20	15.49		S3M	3	1.14	1.90	/
	XXH	31.750	0.7	15.70	22.11		S4.5M	4.5	1.71	2.81	/
	T2.5	2.5	9.53	1.30	2.00		S5M	5	1.91	3.40	4.96
	T5	5	1.2	2.20	3.40		S8M	8	3.05	5.30	7.48
	T10	10	2.50	4.50	7.00		S14M	14	5.30	10.20	/
	T20	20	5.00	8.00	13.00		RP3M	3	1.15	1.90	/
	AT5	5	1.20	2.70	/		RP5M	5	1.95	3.50	/
	AT10	10	2.50	5.00	7.00		RP8M	8	3.20	5.5	/
	At20	20	5.00	8.00	13.00		RP14M	14	6.00	10.00	/

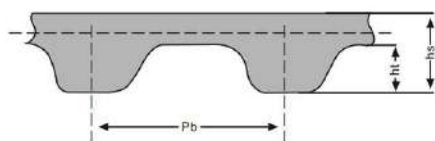


梯形齿
T TOOTH

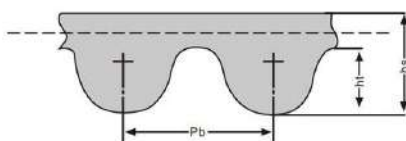


HTD 圆弧齿
HTD ARC TOOTH

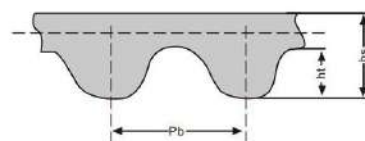


STPD/STS 圆弧齿
STPD/STS ARC TOOTH

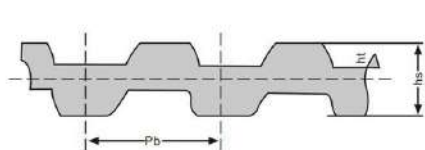

梯形双面齿
DOUBLE T TOOTH

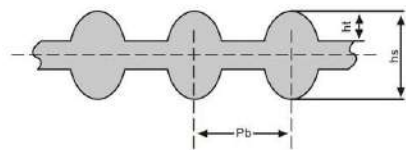

圆弧双面齿
DOUBLE SIDED ARC TOOTH

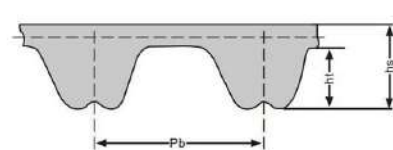

EPP/HPPD 圆弧齿
RPP/HPPD ARC TOOTH

型号规格表

XPZ550/3VX215	XPZ975/3VX385	XPZ1262	XPZ1782/3VX700
XPZ560/3VX220	XPZ980/3VX385	XPZ1270/3VX500	XPZ1787/3VX700
XPZ562/3VX220	XPZ982/3VX385	XPZ1282/3VX505	XPZ1800/3VX710
XPZ580/3VX230	XPZ987/3VX390	XPZ1287	XPZ1812/3VX720
XPZ587/3VX230	XPZ990/3VX390	XPZ1300/3VX510	XPZ1837/3VX725
XPZ600/3VX235	XPZ1000/3VX395	XPZ1312	XPZ1850/3VX730
XPZ621/3VX245	XPZ1010/3VX400	XPZ1320/3VX520	XPZ1862/3VX740
XPZ630/3VX250	XPZ1012/3VX400	XPZ1337/3VX525	XPZ1887/3VX745
XPZ637/3VX250	XPZ1016/3VX400	XPZ1340/3VX530	XPZ1900/3VX750
XPZ650/3VX255	XPZ1024/3VX405	XPZ1346/3VX530	XPZ1937/3VX760
XPZ662/3VX260	XPZ1030/3VX405	XPZ1350/3VX535	XPZ1950/3VX770
XPZ670/3VX265	XPZ1037/3VX410	XPZ1357/3VX535	XPZ1987/3VX780
XPZ680/3VX270	XPZ1041/3VX410	XPZ1362/3VX535	XPZ2000/3VX790
XPZ687/3VX270	XPZ1047/3VX410	XPZ1370/3VX540	XPZ2030/3VX800
XPZ690/3VX270	XPZ1050/3VX415	XPZ1387	XPZ2060/3VX810
XPZ710/3VX280	XPZ1060/3VX420	XPZ1400/3VX550	XPZ2087/3VX820
XPZ722/3VX285	XPZ1067/3VX420	XPZ1412	XPZ2120/3VX840
XPZ725/3VX285	XPZ1077/3VX425	XPZ1420/3VX560	XPZ2137
XPZ730/3VX290	XPZ1080/3VX425	XPZ1432	XPZ2150
XPZ737/3VX290	XPZ1087	XPZ1450/3VX570	XPZ2160/3VX850
XPZ750/3VX295	XPZ1092/3VX430	XPZ1462/3VX575	XPZ2187/3VX860

型号规格表

XPZ760/3VX300	XPZ1100/3VX435	XPZ1475/3VX580	XPZ1782/3VX700
XPZ762/3VX300	XPZ1112/3VX435	XPZ1487/3VX585	XPZ1787/3VX700
XPZ772/3VX310	XPZ1118/3VX440	XPZ1500/3VX590	XPZ1800/3VX710
XPZ787/3VX310	XPZ1120/3VX440	XPZ1512/3VX590	XPZ1812/3VX720
XPZ800/3VX315	XPZ1140/3VX450	XPZ1520/3VX600	XPZ1837/3VX725
XPZ812/3VX320	XPZ1143/3VX450	XPZ1537/3VX605	XPZ1850/3VX730
XPZ825/3VX325	XPZ1150	XPZ1550/3VX610	XPZ1862/3VX740
XPZ837/3VX330	XPZ1168/3VX460	XPZ1562/3VX615	XPZ1887/3VX745
XPZ850/3VX335	XPZ1175	XPZ1575/3VX620	XPZ1900/3VX750
XPZ862/3VX340	XPZ1180/3VX465	XPZ1587/3VX625	XPZ1937/3VX760
XPZ875/3VX345	XPZ1187/3VX470	XPZ1600/3VX630	XPZ1950/3VX770
XPZ887/3VX350	XPZ1194/3VX470	XPZ1612/3VX640	XPZ1987/3VX780
XPZ889/3VX350	XPZ1200/3VX470	XPZ1637/3VX645	XPZ2000/3VX790
XPZ900/3VX355	XPZ1207/3VX475	XPZ1650/3VX650	XPZ2030/3VX800
XPZ912/3VX360	XPZ1212/3VX480	XPZ1662/3VX660	XPZ2060/3VX810
XPZ925/3VX365	XPZ1219/3VX480	XPZ1687	
XPZ937	XPZ1222/3VX480	XPZ1700/3VX670	
XPZ940/3VX370	XPZ1232/3VX485	XPZ1712/3VX680	
XPZ950/3VX375	XPZ1237/3VX490	XPZ1737/3VX685	
XPZ962/3VX380	XPZ1245/3VX490	XPZ1750/3VX690	
XPZ965/3VX380	XPZ1250/3VX490	XPZ1762/3VX695	

型号规格表

XPA732Lw	XPA1232Lw	XPA1882Lw
XPA747Lw	XPA1250Lw	XPA1907Lw
XPA757Lw	XPA1257Lw	XPA1932Lw
XPA770Lw	XPA1272Lw	XPA1950Lw
XPA782Lw	XPA1282Lw	XPA1957Lw
XPA800Lw	XPA1300Lw	XPA1982Lw
XPA807Lw	XPA1307Lw	XPA2000Lw
XPA810Lw	XPA1320Lw	XPA2032Lw
XPA820Lw	XPA1332Lw	XPA2057Lw
XPA830Lw	XPA1350Lw	XPA2060Lw
XPA832Lw	XPA1357Lw	XPA2082Lw
XPA850Lw	XPA1382Lw	XPA2120Lw
XPA857Lw	XPA1400Lw	XPA2132Lw
XPA882Lw	XPA1407Lw	XPA2150Lw
XPA900Lw	XPA1432Lw	XPA2157Lw
XPA907Lw	XPA1450Lw	XPA2182Lw
XPA925Lw	XPA1457Lw	XPA2232Lw
XPA932Lw	XPA1482Lw	XPA2240Lw
XPA950Lw	XPA1500Lw	XPA2282Lw
XPA957Lw	XPA1507Lw	XPA2300Lw
XPA975Lw	XPA1532Lw	XPA2307Lw
XPA982Lw	XPA1550Lw	XPA2332Lw
XPA1000Lw	XPA1557Lw	XPA2360Lw
XPA1007Lw	XPA1582Lw	XPA2382Lw
XPA1030Lw	XPA1600Lw	XPA2400Lw
XPA1032Lw	XPA1607Lw	XPA2430Lw
XPA1050Lw	XPA1632Lw	XPA2482Lw
XPA1060Lw	XPA1650Lw	XPA2500Lw
XPA1080Lw	XPA1657Lw	XPA2532Lw
XPA1082Lw	XPA1682Lw	XPA2582Lw
XPA1090Lw	XPA1700Lw	XPA2607Lw
XPA1107Lw	XPA1732Lw	XPA2632Lw
XPA1120Lw	XPA1750Lw	XPA2650Lw
XPA1132Lw	XPA1757Lw	XPA2682Lw
XPA1140Lw	XPA1782Lw	XPA2732Lw
XPA1150Lw	XPA1800Lw	XPA2782Lw
XPA1157Lw	XPA1807Lw	XPA2800Lw
XPA1180Lw	XPA1832Lw	XPA2832Lw
XPA1200Lw	XPA1850Lw	XPA2847Lw
XPA1207Lw	XPA1857Lw	XPA3000Lw
XPA1215Lw	XPA1882Lw	XPA3350Lw
XPA1219Lw	XPA1880Lw	XPA3150Lw

型号规格表

XPB1000/5VX400	XPB1700	XPB2300/5VX910
XPB1030/5VX410	XPB1720/5VX680	XPB2310
XPB1050/5VX420	XPB1740/5VX690	XPB2340/5VX920
XPB1080/5VX430	XPB1750	XPB2350/5VX930
XPB1100/5VX440	XPB1760/5VX700	XPB2360
XPB1130/5VX450	XPB1790/5VX710	XPB2380/5VX940
XPB1150/5VX460	XPB1800/5VX710	XPB2400/5VX950
XPB1180/5VX470	XPB1820/5VX720	XPB2410
XPB1200/5VX480	XPB1830/5VX720	XPB2430/5VX960
XPB1230/5VX490	XPB1840/5VX730	XPB2450/5VX970
XPB1250	XPB1850	XPB2480/5VX980
XPB1260/5VX500	XPB1870/5VX740	XPB2500/5VX990
XPB1280/5VX510	XPB1900/5VX750	XPB2530/5VX1000
XPB1320/5VX520	XPB1930/5VX760	XPB2550/5VX1010
XPB1340/5VX530	XPB1950/5VX770	XPB2580/5VX1020
XPB1350	XPB1980/5VX780	XPB2600/5VX1030
XPB1360/5VX540	XPB2000/5VX790	XPB2650/5VX1050
XPB1380/5VX550	XPB2020/5VX800	XPB2680/5VX1060
XPB1400/5VX550	XPB2030	XPB2690/5VX1070
XPB1410/5VX560	XPB2040/5VX810	XPB2700/5VX1070
XPB1430/5VX570	XPB2050	XPB2730/5VX1080
XPB1450	XPB2060/5VX820	XPB2750
XPB1460/5VX580	XPB2100/5VX830	XPB2800/5VX1110
XPB1480/5VX590	XPB2120/5VX840	XPB2840/5VX1120
XPB1500	XPB2140	XPB2850
XPB1510/5VX600	XPB2150/5VX850	XPB2860/5VX1130
XPB1540/5VX610	XPB2160	XPB2900/5VX1140
XPB1550	XPB2170/5VX860	XPB2910/5VX1150
XPB1575/5VX620	XPB2200/5VX870	XPB3000/5VX1180
XPB1590/5VX630	XPB2210/5VX870	XPB3150/5VX1240
XPB1600	XPB2220/5VX880	XPB3170
XPB1640/5VX650	XPB2240	XPB3175/5VX1250
XPB1650	XPB2250/5VX890	XPB3350/5VX1320
XPB1660/5VX660	XPB2260	XPB3550/5VX1400
XPB1690/5VX670	XPB2280/5VX900	

型号规格表

XPC 1800Lw	XPC 2600Lw	XPC 3550Lw
XPC 1900Lw	XPC 2650Lw	XPC 3600Lw
XPC 2000Lw	XPC 2690Lw	XPC 3650Lw
XPC 2050Lw	XPC 2700Lw	XPC 3700Lw
XPC 2060Lw	XPC 2740Lw	XPC 3750Lw
XPC 2100Lw	XPC 2750Lw	XPC 3800Lw
XPC 2120Lw	XPC 2800Lw	XPC 3850Lw
XPC 2150Lw	XPC 2850Lw	XPC 3900Lw
XPC 2160Lw	XPC 2900Lw	XPC 3950Lw
XPC 2200Lw	XPC 2950Lw	XPC 4000Lw
XPC 2240Lw	XPC 3000Lw	XPC 4050Lw
XPC 2250Lw	XPC 3050Lw	XPC 4100Lw
XPC 2260Lw	XPC 3100Lw	XPC 4150Lw
XPC 2280Lw	XPC 3150Lw	XPC 4200Lw
XPC 2300Lw	XPC 3200Lw	XPC 4250Lw
XPC 2350Lw	XPC 3250Lw	XPC 4300Lw
XPC 2360Lw	XPC 3300Lw	XPC 4350Lw
XPC 2400Lw	XPC 3350Lw	XPC 4400Lw
XPC 2450Lw	XPC 3400Lw	XPC 4450Lw
XPC 2500Lw	XPC 3450Lw	XPC 4500Lw
XPC 2550Lw	XPC 3500Lw	XPC 4750Lw

汽车V带英制和公制型号表示方法对应表

Av10mm × 8mm RECMF(有齿)

皮带型号	外圆长度 (mm)	有效长度	内圆长度	皮带型号	外圆长度 (mm)	有效长度	内圆长度
1250	AV10 × 640La	630	590 Li	1450	AV10 × 1150La	1140	1100 Li
1260	AV10 × 665La	655	615 Li	1460	AV10 × 1175La	1165	1125 Li
1270	AV10 × 690La	680	640 Li	1470	AV10 × 1200La	1190	1150 Li
1280	AV10 × 715La	705	665 Li	1480	AV10 × 1225La	1215	1175 Li
1290	AV10 × 740La	730	690 Li	1490	AV10 × 1250La	1240	1200 Li
1295	AV10 × 750La	740	700 Li	1500	AV10 × 1275La	1255	1215 Li
1300	AV10 × 765La	755	715 Li	1510	AV10 × 1300La	1290	1250 Li
1305	AV10 × 775La	765	725 Li	1520	AV10 × 1325La	1315	1275 Li
1310	AV10 × 790La	780	740 Li	1530	AV10 × 1350La	1340	1300 Li
1315	AV10 × 800La	790	750 Li	1540	AV10 × 1375La	1365	1325 Li
1320	AV10 × 820La	810	770 Li	1550	AV10 × 1400La	1390	1350 Li
1325	AV10 × 825La	815	775 Li	1560	AV10 × 1425La	1410	1370 Li
1330	AV10 × 835La	825	785 Li	1570	AV10 × 1450La	1440	1400 Li
1335	AV10 × 850La	840	800 Li	1580	AV10 × 1475La	1465	1425 Li
1340	AV10 × 865La	855	815 Li	1590	AV10 × 1500La	1490	1450 Li
1345	AV10 × 875La	865	825 Li	1600	AV10 × 1525La	1515	1475 Li
1350	AV10 × 890La	880	840 Li	1610	AV10 × 1550La	1540	1500 Li
1355	AV10 × 900La	890	850 Li	1620	AV10 × 1575La	1565	1525 Li
1360	AV10 × 915La	905	865 Li	1630	AV10 × 1600La	1590	1550 Li
1365	AV10 × 925La	915	875 Li	1640	AV10 × 1625La	1615	1575 Li
1370	AV10 × 940La	930	890 Li	1650	AV10 × 1650La	1640	1600 Li
1375	AV10 × 950La	940	900 Li	1660	AV10 × 1675La	1665	1625 Li
1380	AV10 × 965La	955	915 Li	1670	AV10 × 1700La	1690	1650 Li
1385	AV10 × 975La	965	925 Li	1680	AV10 × 1725La	1715	1675 Li
1390	AV10 × 990La	980	940 Li	1690	AV10 × 1750La	1740	1700 Li
1395	AV10 × 1000La	990	950 Li	1700	AV10 × 1780La	1770	1730 Li
1400	AV10 × 1020La	1010	970 Li	1710	AV10 × 1800La	1790	1750 Li
1405	AV10 × 1025La	1015	975 Li	1720	AV10 × 1830La	1820	1780 Li
1410	AV10 × 1035La	1025	985 Li	1730	AV10 × 1855La	1845	1805 Li
1415	AV10 × 1050La	1040	1000 Li	1740	AV10 × 1880La	1870	1830 Li
1420	AV10 × 1060La	1050	1010 Li	1750	AV10 × 1900La	1890	1850 Li
1425	AV10 × 1075La	1065	1025 Li	1760	AV10 × 1930La	1920	1880 Li
1430	AV10 × 1090La	1075	1035 Li	1770	AV10 × 1955La	1945	1905 Li
1435	AV10 × 1100La	1090	1050 Li	1780	AV10 × 1980La	1970	1930 Li
1440	AV10 × 1125La	1115	1075 Li	1790	AV10 × 2000La	1990	1950 Li
1445	AV10 × 1140La	1130	1090 Li	1800	AV10 × 2030La	2020	1980 Li

汽车V带英制和公制型号表示方法对应表

Av13mm × 9mm RECMF(有齿)

皮带型号	外圆长度 (mm)	有效长度	内圆长度	皮带型号	外圆长度 (mm)	有效长度	内圆长度
6240	AV13 × 585Li	630	640 La	6480	AV13 × 1200Li	1245	1255 La
6250	AV13 × 610Li	655	665 La	6490	AV13 × 1225Li	1265	1275 La
6255				6500	AV13 × 1250Li	1295	1305 La
6260	AV13 × 635Li	680	690 La	6510	AV13 × 1270Li	1315	1325 La
6270	AV13 × 660Li	705	715 La	6515	AV13 × 1280Li	2055	
6280	AV13 × 685Li	730	740 La	6520	AV13 × 1300Li	1345	1355 La
6290	AV13 × 715Li	760	770 La	6530	AV13 × 1320Li	1365	1375 La
6300	AV13 × 735Li	780	790 La	6540	AV13 × 1340Li	1385	1400 La
6305				6550	AV13 × 1370Li	1415	1425 La
6310	AV13 × 760Li	805	815 La	6555	AV13 × 1380Li	2055	
6315	AV13 × 775Li	820	830 La	6560	AV13 × 1400Li	1445	1455 La
6320	AV13 × 785Li	830	840 La	6570	AV13 × 1420Li	1465	1475 La
6325	AV13 × 800Li	845	855 La	6580	AV13 × 1450Li	1495	1505 La
6330	AV13 × 815Li	860	870 La	6590	AV13 × 1475Li	1520	1530 La
6335	AV13 × 825Li	870	880 La	6600	AV13 × 1500Li	1545	1555 La
6340	AV13 × 835Li	880	890 La	6610	AV13 × 1525Li	1570	1580 La
6345	AV13 × 850Li	895	905 La	6620	AV13 × 1550Li	1600	1610 La
6350	AV13 × 865Li	910	920 La	6630	AV13 × 1580Li	1625	1635 La
6360	AV13 × 890Li	935	945 La	6640	AV13 × 1600Li	1645	1655 La
6365	AV13 × 900Li	945	955 La	6650	AV13 × 1625Li	1675	1685 La
6370	AV13 × 915Li	960	970 La	6660	AV13 × 1655Li	1700	1710 La
6375	AV13 × 925Li	970	980 La	6670	AV13 × 1675Li	1725	1735 La
6380	AV13 × 940Li	985	995 La	6680	AV13 × 1700Li	1745	1755 La
6390	AV13 × 965Li	1010	1020 La	6690	AV13 × 1725Li	1775	1785 La
6400	AV13 × 990Li	1035	1045 La	6700	AV13 × 1750Li	1800	1810 La
6405	AV13 × 1000Li	1045	1055 La	6710	AV13 × 1775Li	1825	1835 La
6410	AV13 × 1015Li	1060	1070 La	6720	AV13 × 1800Li	1845	1855 La
6420	AV13 × 1040Li	1085	1095 La	6730	AV13 × 1830Li	1875	1885 La
6430	AV13 × 1065Li	1110	1120 La	6740	AV13 × 1860Li	1905	1915 La
6440	AV13 × 1090Li	1135	1145 La	6750	AV13 × 1885Li	1930	1940 La
6445	AV13 × 1100Li			6760	AV13 × 1910Li	1955	1965 La
6450	AV13 × 1120Li	1165	1175 La	6770	AV13 × 1935Li	1980	1990 La
6460	AV13 × 1140Li	1185	1195 La	6780	AV13 × 1960Li	2005	2015 La
6465	AV13 × 1150Li			6790	AV13 × 1985Li	2030	2040 La
6470	AV13 × 1170Li	1215	1225 La	6800	AV13 × 2010Li	2055	2065 La

汽车V带英制和公制型号表示方法对应表

Av17mm×11mm RECMF(有齿)

皮带型号	外圆长度 (mm)	有效长度	内圆长度	皮带型号	外圆长度 (mm)	有效长度	内圆长度
8270	AV17×650Li		720La		AV17×1016Li		
8280	AV17×675Li	730	745La	8430	AV17×1056Li	1130	1145La
8290	AV17×700Li	755	770La	8430	AV17×1041Li		
8300	AV17×725Li	780	795La	8430	AV17×1050Li		
8310	AV17×750Li	805	820La	8430	AV17×1052Li		
8320	AV17×775Li	825	840La		AV17×1060Li		
8320	AV17×766Li			8440	AV17×1067Li		
8325	AV17×785Li	840	855La	8440	AV17×1075Li		
8330	AV17×800Li				AV17×1063Li		
8335	AV17×815Li	870	885La	8445	AV17×1082Li	1140	1155La
8340	AV17×825Li			8445	AV17×1080Li		
8345	AV17×835Li	890	905La		AV17×1092Li		
8350	AV17×850Li				AV17×1100Li		
8355	AV17×865Li	920	935La	8450	AV17×1120Li	1155	1170La
8360	AV17×875Li	935	950La	8450	AV17×1113Li		
8370	AV17×900Li		970La	8450	AV17×1110Li		
8375	AV17×915Li	970	985La	8450	AV17×1118Li		
8380	AV17×925Li			8460	AV17×1143Li	1185	1200La
8385	AV17×1030Li			8460	AV17×1130Li		
8390	AV17×940Li	995	1010La	8460	AV17×1135Li		
	AV17×950Li			8465	AV17×1150Li	1205	1220La
8400	AV17×960Li			8470	AV17×1170Li	1210	1225La
8400	AV17×975Li	1030	1045La	8470	AV17×1160Li		
	AV17×965Li			8470	AV17×1168Li		
8410	AV17×985Li			8475	AV17×1175Li	1235	1250La
8410	AV17×1000Li	1055	1070La	8480	AV17×1200Li	1240	1255La
8410	AV17×990Li				AV17×1180Li		
8420	AV17×991Li			8490	AV17×1210Li	1265	1280La
8420	AV17×1030Li	1085	1100La		AV17×1219Li	1275	1290La

汽车V带英制和公制型号表示方法对应表

Av17mm×11mm RECMF(有齿)

8495	AV17×1220Li			8670	AV17×1675Li	1715	1730La
8500	AV17×1250Li	1305	1320La	8680	AV17×1700Li	1740	1755La
	AV17×1232Li			8690	AV17×1725Li	1765	1780La
8500	AV17×1245Li			8700	AV17×1750Li	1790	1805La
8510	AV17×1270Li	1315	1330La	8710	AV17×1775Li	1815	1830La
8510	AV17×1260Li			8720	AV17×1800Li	1850	1865La
8520	AV17×1300Li	1340	1355La	8730	AV17×1825Li	1870	1885La
	AV17×1280Li			8740	AV17×1850Li	1890	1905La
8520	AV17×1290Li			8750	AV17×1875Li	1920	1935La
8520	AV17×1295Li			8760	AV17×1900Li	1945	1960La
8530	AV17×1320Li	1365	1380La	8770	AV17×1925Li	1965	1980La
8540	AV17×1340Li	1390	1405La	8780	AV17×1950Li	1990	2005La
8550	AV17×1370Li	1415	1430La	8790	AV17×1975Li	2005	2020La
8550	AV17×1360Li			8800	AV17×2000Li	2035	2050La
8560	AV17×1400Li	1440	1455La	8810	AV17×2025Li	2065	2080La
8560	AV17×1380Li			8820	AV17×2050Li	2090	2105La
8570	AV17×1420Li	1465	1480La	8830	AV17×2075Li	2115	2130La
8580	AV17×1450Li	1490	1505La	8840	AV17×2100Li	2142	2157La
	AV17×1430Li			8850	AV17×2125Li	2165	2180La
8590	AV17×1475Li	1515	1530La	8855	AV17×2140Li		
	AV17×1460Li			8860	AV17×2150Li	2190	2205La
8600	AV17×1500Li	1545	1560La	8870	AV17×2175Li	2215	2230La
8610	AV17×1525Li	1565	1580La	8880	AV17×2200Li	2245	2260La
8620	AV17×1550Li	1590	1605La	8890	AV17×2225Li	2255	2270La
8630	AV17×1575Li	1615	1630La	8900	AV17×2250Li	2295	2310La
8630	AV17×1560Li			8910	AV17×2275Li	2320	2335La
8640	AV17×1600Li	1640	1655La	8920	AV17×2300Li	2345	2360La
8650	AV17×1625Li	1665	1680La	8930	AV17×2325Li	2370	2385La
8660	AV17×1650Li	1690	1705La				

汽车V带英制和公制型号表示方法对应表

Av22mm × 13mm RECMF(有齿)

皮带型号	外圆长度 (mm)	有效长度	内圆长度	皮带型号	外圆长度 (mm)	有效长度	内圆长度
9280	AV22 × 675Li	735	755 La	9495	AV22 × 1220Li	1280	1300 La
9285	AV22 × 685Li	745	765 La	9500	AV22 × 1235Li	1295	1315 La
9290	AV22 × 700Li	760	780 La	9505	AV22 × 1250Li	1310	1330 La
9295	AV22 × 710Li	770	790 La	9510	AV22 × 1260Li	1320	1340 La
9305	AV22 × 730Li	790	810 La	9515	AV22 × 1270Li	1330	1350 La
9310	AV22 × 745Li	805	825 La	9520	AV22 × 1285Li	1345	1365 La
9315	AV22 × 760Li	820	840 La	9525	AV22 × 1300Li	1360	1380 La
9320	AV22 × 770Li	830	850 La	9530	AV22 × 1310Li	1370	1390 La
9320	AV22 × 766Li			9535	AV22 × 1320Li	1380	1400 La
9325	AV22 × 785Li	845	865 La	9540	AV22 × 1335Li	1395	1415 La
9330	AV22 × 800Li	860	880 La	9545	AV22 × 1350Li	1410	1430 La
9335	AV22 × 815Li	875	895 La	9550	AV22 × 1360Li	1420	1440 La
9340	AV22 × 825Li	885	905 La	9555	AV22 × 1370Li	1430	1450 La
9345	AV22 × 835Li	895	915 La	9560	AV22 × 1388Li	1445	1465 La
9350	AV22 × 850Li	910	930 La	9565	AV22 × 1400Li	1460	1480 La
9355	AV22 × 865Li	925	945 La	9565	AV22 × 1397Li		
9360	AV22 × 875Li	935	955 La	9570	AV22 × 1410Li	1470	1490 La
9365	AV22 × 890Li	950	970 La	9575	AV22 × 1420Li	1480	1500 La
9370	AV22 × 900Li	960	980 La	9580	AV22 × 1435Li	1495	1515 La
9375	AV22 × 915Li	975	995 La	9585	AV22 × 1450Li	1510	1530 La
9380	AV22 × 925Li	985	1005 La	9585	AV22 × 1448Li		
9385	AV22 × 940Li	1000	1020 La	9590	AV22 × 1460Li	1520	1540 La
9390	AV22 × 950Li	1010	1030 La	9595	AV22 × 1475Li	1535	1555 La
9400	AV22 × 975Li	1035	1055 La		AV22 × 1470Li		
9410	AV22 × 1000Li	1060	1080 La	9600	AV22 × 1490Li	1550	1570 La
9420	AV22 × 1030Li	1085	1105 La	9600	AV22 × 1480Li		
9425	AV22 × 1040Li	1100	1120 La	9605	AV22 × 1500Li	1560	1580 La
9430	AV22 × 1050Li	1110	1130 La	9610	AV22 × 1510Li	1570	1590 La
9435	AV22 × 1060Li	1115	1135 La	9615	AV22 × 1525Li	1585	1605 La
9440	AV22 × 1075Li	1135	1155 La	9620	AV22 × 1535Li	1595	1615 La
9440	AV22 × 1143Le			9625	AV22 × 1555Li	1615	1635 La
9445	AV22 × 1090Li	1150	1170 La	9630	AV22 × 1560Li	1620	1640 La
9450	AV22 × 1100Li	1160	1180 La	9635	AV22 × 1575Li	1635	1655 La
9450	AV22 × 1098Li			9640	AV22 × 1585Li	1645	1665 La
9450	AV22 × 1190La			9645	AV22 × 1600Li	1660	1680 La
9455	AV22 × 1120Li	1180	1200 La	9650	AV22 × 1610Li	1670	1690 La
9460	AV22 × 1130Li	1190	1210 La	9655	AV22 × 1625Li	1685	1705 La
9465	AV22 × 1140Li	1200	1220 La		AV22 × 1626Li		
9470	AV22 × 1155Li	1215	1235 La	9660	AV22 × 1635Li	1695	1715 La
9475	AV22 × 1170Li	1230	1250 La	9665	AV22 × 1650Li	1710	1730 La
9480	AV22 × 1185Li	1245	1265 La	9670	AV22 × 1660Li	1720	1740 La
9485	AV22 × 1200Li	1260	1280 La	9675	AV22 × 1675Li	1735	1755 La
9490	AV22 × 1210Li	1270	1290 La	9680	AV22 × 1685Li	1745	1765 La

汽车V带英制和公制型号表示方法对应表

Av22mm × 13mm RECMF(有齿)

皮带型号	外圆长度 (mm)	有效长度	内圆长度	皮带型号	外圆长度 (mm)	有效长度	内圆长度
9685	AV22 × 1700Li	1760	1780 La	9805	AV22 × 2000Li	2060	2080 La
9690	AV22 × 1710Li	1770	1790 La	9810	AV22 × 2010Li	2070	2090 La
9695	AV22 × 1725Li	1785	1805 La	9815	AV22 × 2025Li	2085	2105 La
9700	AV22 × 1735Li	1795	1815 La	9820	AV22 × 2035Li	2095	2115 La
9705	AV22 × 1750Li	1810	1830 La	9825	AV22 × 2050Li	2110	2130 La
9710	AV22 × 1760Li	1820	1840 La	9830	AV22 × 2060Li	2120	2140 La
9715	AV22 × 1775Li	1835	1855 La	9835	AV22 × 2075Li	2135	2155 La
9720	AV22 × 1785Li	1845	1865 La	9840	AV22 × 2085Li	2145	2165 La
9725	AV22 × 1800Li	1860	1880 La	9840	V20 × 2150Le		2165 La
9730	AV22 × 1815Li	1875	1895 La	9845	AV22 × 2100Li	2160	2180 La
9735	AV22 × 1825Li	1885	1905 La	9850	AV22 × 2115Li	2175	2195 La
9740	AV22 × 1835Li	1895	1915 La	9855	AV22 × 2125Li	2185	2205 La
9745	AV22 × 1850Li	1910	1930 La	9860	AV22 × 2140Li	2200	2220 La
9750	AV22 × 1865Li	1925	1945 La	9865	AV22 × 2150Li	2210	2230 La
9755	AV22 × 1880Li	1940	1960 La	9870	AV22 × 2165Li	2225	2245 La
9760	AV22 × 1890Li	1950	1970 La	9875	AV22 × 2175Li	2235	2255 La
9765	AV22 × 1900Li	1960	1980 La	9880	AV22 × 2190Li	2250	2270 La
9770	AV22 × 1910Li	1970	1990 La	9885	AV22 × 2205Li	2265	2285 La
9775	AV22 × 1925Li	1985	2005 La	9890	AV22 × 2215Li	2275	2295 La
9780	AV22 × 1935Li	1995	2015 La	9895	AV22 × 2225Li	2285	2305 La
9785	AV22 × 1950Li	2010	2030 La	9900	AV22 × 2240Li	2300	2320 La
9790	AV22 × 1965Li	2025	2045 La	9910	AV22 × 2265Li	2325	2345 La
9795	AV22 × 1975Li	2035	2055 La	9920	AV22 × 2290Li	2350	2370 La
9800	AV22 × 1985Li	2045	2065 La	9930	AV22 × 2315Li	2375	2395 La

注意事项



警告
WARNING

- 包括带轮在内的旋转部分，可能会夹入头发、手套、衣服等，请注意服装的着用；
- 在进行皮带维修、检查、更换操作时，一定要停止运转，确认皮带停止后在进行操作；
- 在进行皮带维修、检查、更换操作过程中，切勿启动设备。

- Please pay attention to your dressings for the rotating part including belt wheel may wrap your hair gloves or clothes;
- Stop operation and confirm the belt is stopped before you repair, inspect or replace parts;
- Never starting the equipment when repair, inspect or replace belts.



注意
NOTICE

- 在换皮带和带轮的时候，使用与原有皮带同一规格的产品；
- 在皮带绷紧的状态下，不要用刀子或剪刀剪断皮带，否则有崩裂致伤的危险；
- 把皮带装在带轮的中心，如果中心对不准会造成一侧过分摩擦而缩短皮带的使用寿命。

- Please use the product identical to the formal ones used when replacing belts and belt wheels;
- Never cut out belt using knives or scissors if the belt is in tension status, otherwise it may cause broken-up and result in injury;
- Install the belt in the center of belt wheel, if not aligned to the center, it may cause excessive friction on one side and thus shorten service life of belt.



注意
NOTICE

- 停止运转后，不要用手立即触摸皮带和带轮，以免烫伤；
- 换装皮带时，应先松弛张紧力，勉强安装会造成皮带提早破损；
- 安装和使用维持规定的张紧力，否则会引起噪音乃至破损；
- 同一带轮上安装多条皮带时，务必同时更换所有的皮带，否则也会造成皮带的早破损。

- Never touch the belt or belt wheel immediately after the equipment is stopped. Or you may be scalded.
- Please release the tension before replacing belts, or it may result in breakage of belt.
- Maintain specified tension during installation and operation, or it may cause noise or even breakage.
- Please replace all belts if more than one belt is installed on a belt wheel, or it may result in breakage of belt.

